


RTD WITH CABLE (MINERAL INSULATED)

R-200

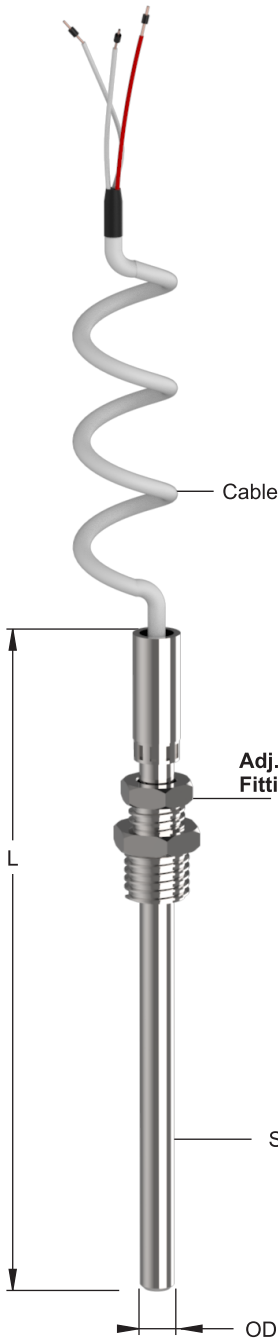

RTD Element

| | |
|-------|-------------------|
| 1 | Pt-100x1, Simplex |
| 2 | Pt-100x2, Duplex |
| Other | Consult Factory |

Junction Style

| | |
|----|---------|
| W2 | 2- Wire |
| W3 | 3- Wire |
| W4 | 4- Wire |

Sheath Diameter "OD"

| | |
|-------|-----------------|
| 3 | Ø3mm |
| 4.5 | Ø4.5mm |
| 6 | Ø6mm |
| 8 | Ø8mm |
| Other | Consult Factory |

Sheath Material

| | |
|-------|-----------------|
| 316 | SS 316 |
| Other | Consult Factory |

Adj. Comp. Fitting

Adj. Comp. Fitting

| | |
|-----------------|--------|
| Threads | 1/4" |
| | 1/2" |
| | 3/8" |
| | 3/4" |
| | 1" |
| B.S.P. / N.P.T. | 1 1/4" |
| | 1 1/2" |
| | 2" |

Nominal Length of RTD "L"(mm)

| | |
|----------|--------------------------------|
| M-Thread | M20X1.5, M18X1.5, M33X2, M27X2 |
| Other | Consult Factory |
| N/A | Not Applicable |

Type of Cable

| | |
|-------|--|
| A | Teflon/Teflon Insulated Flexible Cable |
| B | Teflon Insulated & SS Braided Flexible Cable |
| C | FG/FG Insulated Flexible Cable |
| D | PVC/PVC Insulated Flexible Cable |
| E | FG/FG/Insulated/SS Braided |
| Other | Consult Factory |

Cable Length (mm)

Calibration Standard

| | |
|---|-------------|
| A | ANSI MC96.1 |
| D | DIN |
| I | IEC |