


THERMOCOUPLE WITH CABLE & CONNECTOR

T-271

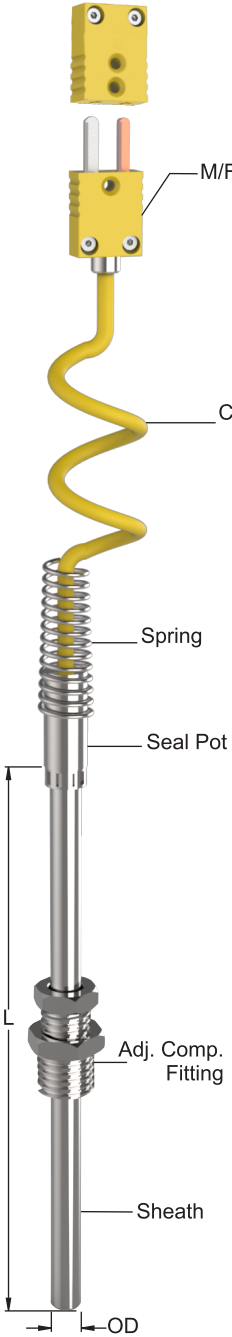

Termination Style		A	Standard Plug & Socket
		B	Miniature Plug & Socket
		Other	Consult Factory
Junction Style		A	Grounded
		B	Ungrounded
Thermocouple Element		Type of T/C	Description
		K	Chromel/Alumel
		J	Iron/Constantan
		N	Nicrosil-Nisil
		T	Copper/Constantan
		E	Chromel/Constantan
		Other	Consult Factory
		Ex. :	If Simplex - K Duplex - KK
Sheath "OD"		1	Ø1mm
		1.5	Ø1.5mm
		3	Ø3mm
		4.5	Ø4.5mm
		6	Ø6mm
		8	Ø8mm
		Other	Consult Factory
Sheath Material		316	SS 316
		310	SS 310
		600	Inconel-600
		Other	Consult Factory
Fitting		Threads	1/4"
			1/2"
			3/8"
			3/4"
		B.S.P. / N.P.T.	1"
			1 1/4"
			1 1/2"
			2"
		M-Thread	M20X1.5, M18X1.5, M33X2, M27X2
		Other	Consult Factory
		N/A	Not Applicable
Nominal Length of T/C (L) (mm)			
Type of Cable		A	Teflon/Teflon Insulated Flexible Cable
		B	Teflon Insulated & SS Braided Flexible Cable
		C	FG/FG Insulated Flexible Cable
		D	PVC/PVC Insulated Flexible Cable
		E	FG/FG/Insulated/SS Braided
		Other	Consult Factory
Cable Length (mm)			
Calibration Standard		A	ANSI MC96.1
		D	DIN
		I	IEC