


THERMOCOUPLE WITH JUNCTION BOX & ADJUSTABLE COMPRESSION FITTING WITH STUB

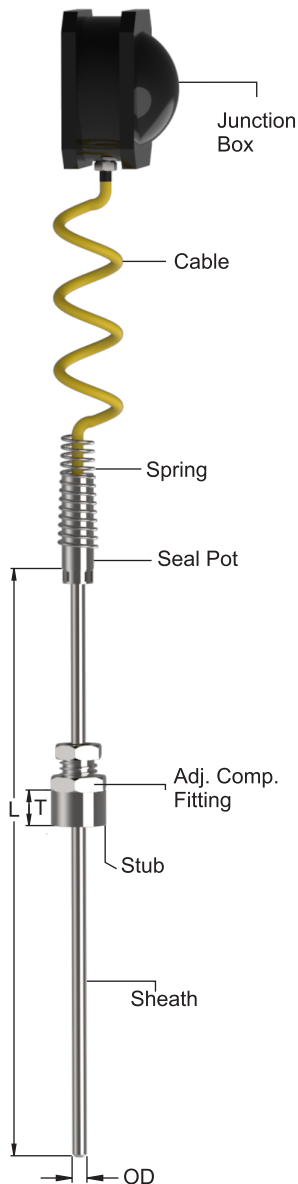

T-274

Termination Style	<input type="text"/>	JB	Junction Box
		Other	Consult Factory
Junction Style	<input type="text"/>	GN	Grounded
		UN	Ungrounded
Thermocouple Element	<input type="text"/>	Type of T/C	Description
		K	Chromel/Alumel
		J	Iron/Constantan
		N	Nicrosil-Nisil
		T	Copper/Constantan
		Other	Consult Factory
Ex. :	If Simplex - K Duplex - KK		
Sheath "OD"	<input type="text"/>	1	Ø1mm
		1.5	Ø1.5mm
		3	Ø3mm
		4.5	Ø4.5mm
		6	Ø6mm
		8	Ø8mm
Other	Consult Factory		
Sheath Material	<input type="text"/>	316	SS 316
		310	SS 310
		600	Inconel-600
		Other	Consult Factory
Process Conn.	<input type="text"/>	Threads	1/4"
			1/2"
			3/8"
			3/4"
			1"
			1 1/4"
		1 1/2"	
		2"	
M-Thread	M20X1.5, M18X1.5, M33X2, M27X2		
	Other	Consult Factory	
Stub Length "T" (mm)	<input type="text"/>		
Nominal Length of T/C (L) (mm)	<input type="text"/>		
Type of Cable	<input type="text"/>	A	Teflon/Teflon Insulated Flexible Cable
		B	Teflon Insulated & SS Braided Flexible Cable
		C	FG/FG Insulated Flexible Cable
		D	PVC/PVC Insulated Flexible Cable
		E	FG/FG/Insulated/SS Braided
Other	Consult Factory		
Cable Length (mm)	<input type="text"/>		
Calibration Standard	<input type="text"/>	A	ANSI MC96.1
		D	DIN
		I	IEC